


爱普生 i3200-U喷头

UV平板打印机

宽幅 90x60cm

FB-0906

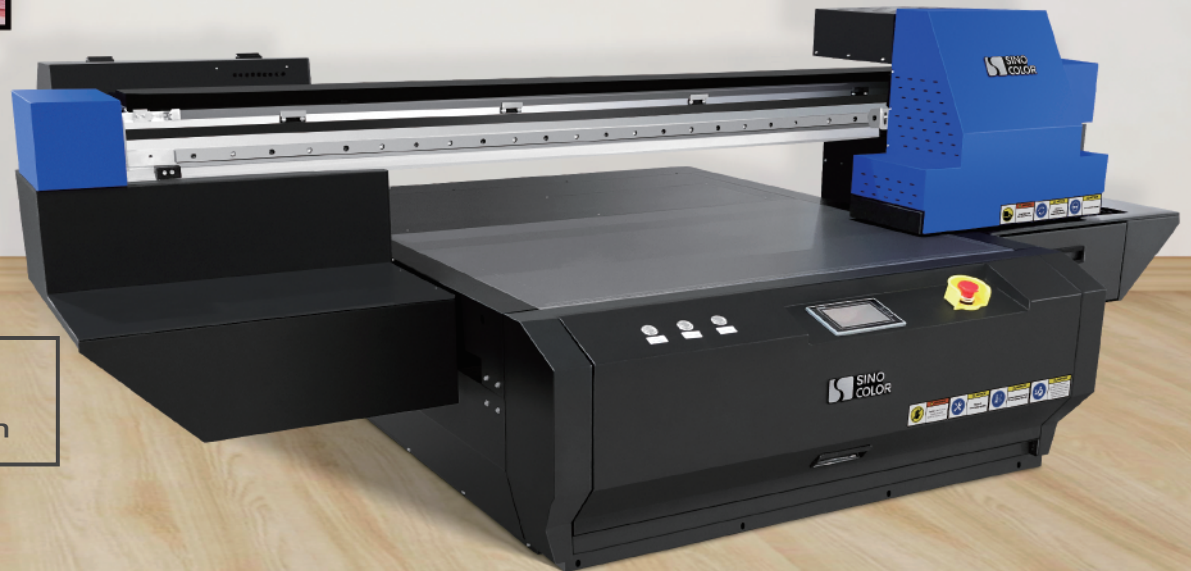


- 2/3喷头 2/3 Printheads
- 4/5/6色写真 4/5/6-Color
- 可变墨滴 Variable Dot
- 白色和光油 White & Varnish

● 特点 Features




双爱普生官方i3200喷头
采用PrecisionCore技术, 为速度而生

Dual Epson officially supplied i3200 heads.
Powered by Epson PrecisionCore technology,
born for speed



X方向从60cm升级为90cm. 极大的减少了
每个画面打印的Pass数, 显著提高同一精
度下的打印速度

Designed X direction width set at 90cm
instead of 60cm, effectively increase the printing
speed of same resolution



内嵌旋转装置, 适用于各类圆柱体打印, 较
外置装置更稳定

Well-designed built-in rotary device is optional.
Fit for different type of cylinder shape subject.
More stable and functional than external device
and save space.



配备自动测高功能, 有效简化材料厚度设置

Automatic media height detecting function,
provide great help for setting the proper print
height



Split Design Base Rack Is Optional

分体式紧凑机身设计, 减少机器尺寸, 实现
有限办公空间的高效利用

Printer and base rack using split design (base rack is
optional), compact and easy to place, greatly reduce
the package size, save the transportation fee



● 参数 Specification

型号	Model No.	FB-0906S	
喷头	Printhead	2/3 爱普生 i3200-U	
精度	Resolution	2400 dpi	
耗材 Media	厚度 Thickness	12 cm Max	
	尺寸 Size	900 × 600 毫米	
	种类 Types	玻璃, 亚克力, 陶瓷, 金属, 纸, 木板, 皮革, PVC, PP, PE, PTFE等 Glass, Acrylic, Ceramic, Metal, Paper, Wood, Leather, PVC, PP, PE, PTFE Etc.	
速度 Speed	模式 Mode	2 喷头, 彩+白	
	草图 Draft	30 平米/小时	
	标准 Production	23 平米/小时	
	精细 Quality	15 平米/小时	
墨水 Ink	墨水 Type	UV墨水	
	颜色 Color	CMYK/CMYK + W	
	墨瓶 Capacity	500 毫升	
	干燥 Dry System	UV光固化系统 UV-LED Light System	
系统	PC Operation System	Windows 7, Windows XP, Windows 10	
环境	Environment	温度: 20-28°C, 湿度: 40%-60%	
软件	Rip Software	蒙泰 (标配) / Photoprint (选配)	
图片格式	Image Format	TIFF, JPEG, EPS, PDF...	
电源	Power	Max 3.6KW, AC 50/60Hz, 220V(±10%)>12A	
尺寸 Size	机器 Machine	L2200 × W1250 × H1400 mm	
	包装 Packing	L2440 × W1450 × H1070 mm	
重量 Weight	机器 Machine	280 KG	
	包装 Packing	400 KG	

以上参数可能随机器版本改变, 请以厂家最新数据为准。Specifications are subject to change without notice.